

## GENERAL

The Fire Control Instruments ASD Series analog addressable plug-in smoke sensors with integral communication provide features that surpass conventional sensors. Detector sensitivity can be programmed in the control panel software. Sensitivity is continuously monitored and reported to the panel. Point ID capability allows each sensor's address to be set with decade address switches, providing exact locations for selective maintenance when chamber contamination reaches an unacceptable level. The ASD-IL2 ionization sensor incorporates a unique single-source, dual-chamber design to respond quickly and dependably to a broad range of fires.

## INSTALLATION

ASD-IL2 plug-in sensors use a separate base to simplify installation, service, and maintenance. A special tool allows maintenance personnel to plug in and remove sensors without using a ladder.

Mount base on a box which is at least 1.5" (3.81 cm) deep. Suitable mounting base boxes include:

- 4.0" (10.16 cm) square box.
- 3.5" (8.89 cm) or 4.0" (10.16 cm) octagonal box.
- Single-gang box (**except relay or isolator base**).
- **With B501BH base**, use a 4.0" (10.16 cm) square box.
- **With B224RB or B224BI base**, use a 3.5" (8.89 cm) octagonal box, or a 4.0" (10.16 cm) octagonal or square box.

**NOTE:** Because of the inherent supervision provided by the SLC, **end-of-line resistors** are not required. Wiring "T-taps" or branches are permitted for Style 4 (Class "B") wiring.

## FEATURES

- **Sleek, low-profile design.**
- **Addressable-analog communication.**
- **Stable communication technique with noise immunity.**
- **Low standby current.**
- **Rotary 01 to 99 address switches**
- **Optional remote, single-gang LED accessory (RA400Z).**
- **Dual LED design provides 360° viewing angle.**
- **Visible red LEDs flash every time the detector is polled, and light steadily on alarm.**
- **Built-in functional test switch activated by external magnet.**
- **Optional relay, isolator, or sounder bases.**
- **Listed to UL Standard 268.**



ASD-IL2


## DETECTOR SPACING:

FCI recommends spacing sensors in compliance with NFPA 72. In low airflow applications with smooth ceilings, space detectors 30 feet (9.144 m). For specific information regarding sensor spacing, placement, and special applications, refer to NFPA 72. *System Smoke Detector Application Guide*, document A05-1003, is available at [www.systemsensor.com](http://www.systemsensor.com).



## An ISO 9001 Company

Specifications are provided for information only, and are not intended to be used for installation purposes and are believed to be accurate. However, no responsibility is assumed by Fire Control Instruments for their use. Specifications subject to change without notice.

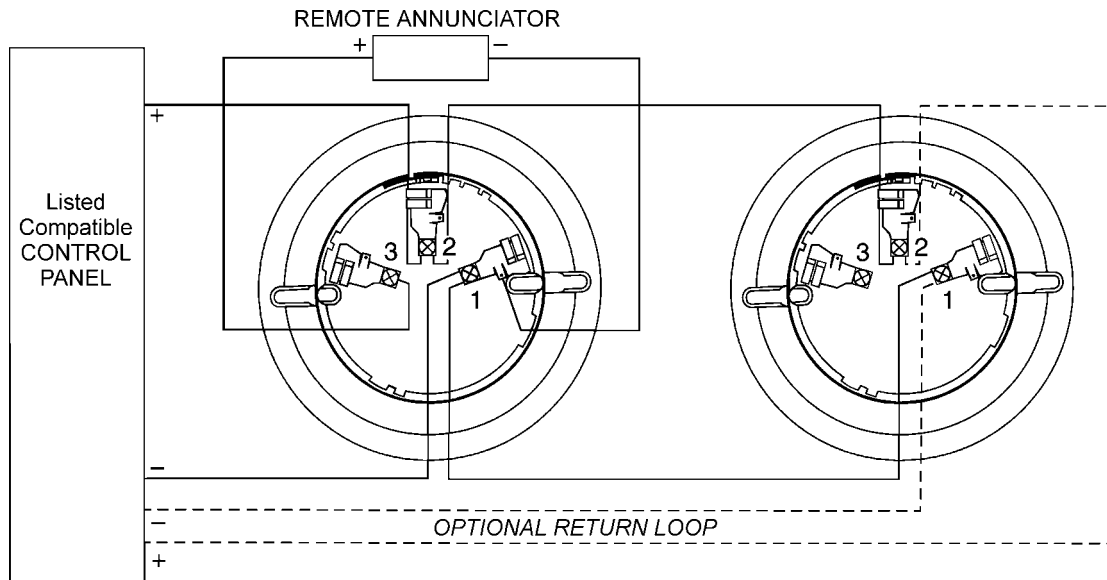

## SPECIFICATIONS

**Size:** 2.1" (5.1 cm) high x 4.1" (10.4 cm) diameter installed in B501 base, 6.1" (15.5 cm) diameter installed in ADB-FL base.

**Shipping weight:** 5.4 oz. (154 g).

**Operating temperature:** 0°C to 49°C (32°F to 120°F).

**UL-Listed velocity range:** 0 – 1200 ft./min. (365.76 m/min.).

**Relative humidity:** 10% – 93% noncondensing.

## ELECTRICAL SPECIFICATIONS

**Voltage range:** 15 - 32 volts DC peak.

**Standby current (max. avg.):** 200 µA @ 24 VDC (without communication); 300 µA @ 24 VDC (one communication every 5 seconds with LED enabled).

**LED current (max.):** 6.5 mA @ 24 VDC ("ON").

## BASES AVAILABLE

**B210LP:** 6.1" (15.5 cm) diameter.

**B501:** 4.1" (10.4 cm) diameter.

**B501BH or B501BHT:** Sounder base assembly (B501BHT produces a temporal pattern). Includes B501 base.

**B224RB Relay Base:** **Screw terminals:** up to 14 AWG (2.0 mm<sup>2</sup>). **Relay type:** Form-C. **Rating:** 2.0 A @ 30 VDC resistive; 0.3 A @ 110 VDC inductive; 1.0 A @ 30 VDC inductive. **Dimensions:** 6.2" (15.748 cm) x 1.2" (3.048 cm).

**B524BI Isolator Base:** **Dimensions:** 6.2" (15.748 cm) x 1.2" (3.048 cm). **Maximum:** 25 devices between isolator bases.

Specifications are provided for information only, and are not intended to be used for installation purposes and are believed to be accurate. However, no responsibility is assumed by Fire Control Instruments for their use. Specifications subject to change without notice.

© 2003 All Rights Reserved

## FIRE CONTROL INSTRUMENTS

16 Southwest Park, Westwood, MA 02090 USA • Tel: 781-471-3000 • Fax: 781-471-3099 • [www.firecontrolinstruments.com](http://www.firecontrolinstruments.com)

A Honeywell Company

9020-0558/Ver. 1.2 / Page 2 of 2